

8

7

6

5

4

3

2

1

已确认此版本的所有图纸

客户签名:

日期:

REV

DESCRIPTION

DATE




1.0

首次设计

2021-08-28

Pin Assignment

1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HS
33	VS
34	DE
35	NC
36	GND
37	TP_R
38	TP_D
39	TP_L
40	TP_U

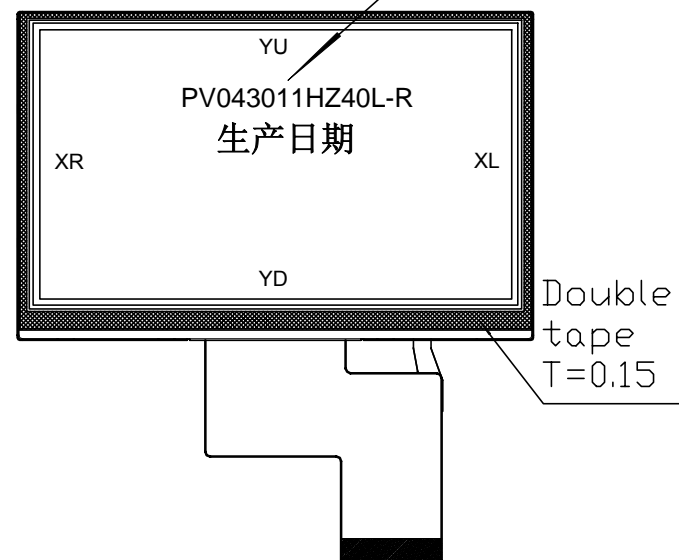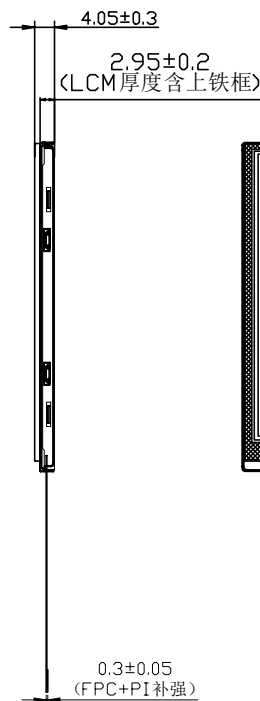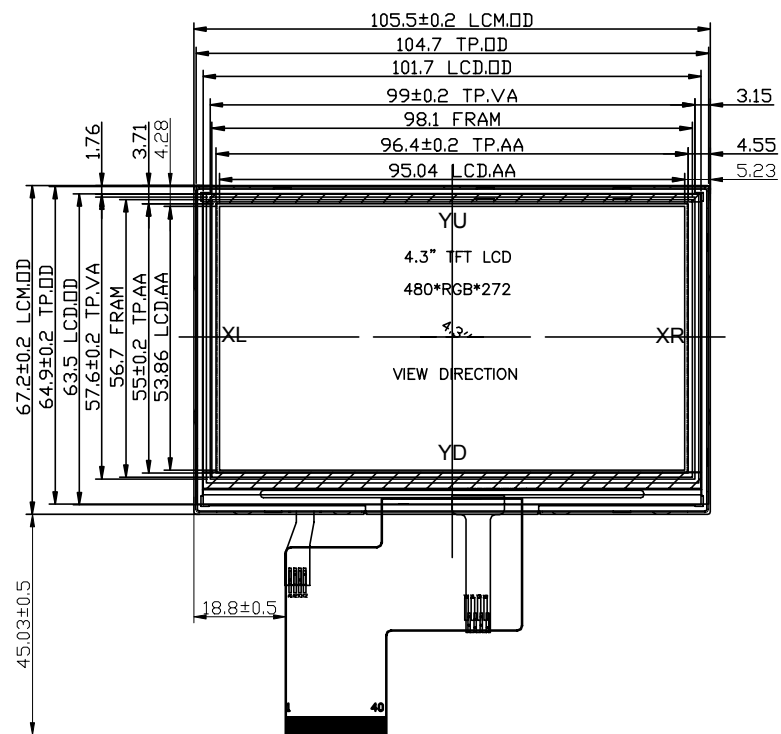

I=40mA V=15.6V

NOTES:

- 1、Display type: 4.3"
- 2、Viewing direction: 6 O' CLOCK
- 3、Drive IC: ST7282
- 4、Backlight color: 10 LED WHITE
- 5、Operation temperature: -20~70° C
- 6、Storage temperature: -30~80° C
- 7、LCM Operating Voltage: Vdd=3.3V
- 8、VAmds: 模块可视区域, 建议外壳可视区域比VAmds单边小0.3以上

TITLE: ASSEMBLY

DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2

PART NO.:

PV043011HZ40L-R

DRAWN BY:

DATE:

PROJECTION:



CHECKED BY:

DATE:

SCALE:N.T.S

UNIT: mm

APPROVED BY:

DATE:

SHEET: 1 OF 1

Kingtech Group Co.,Ltd.

6

3

2

1